


BARBED WIRE FENCE

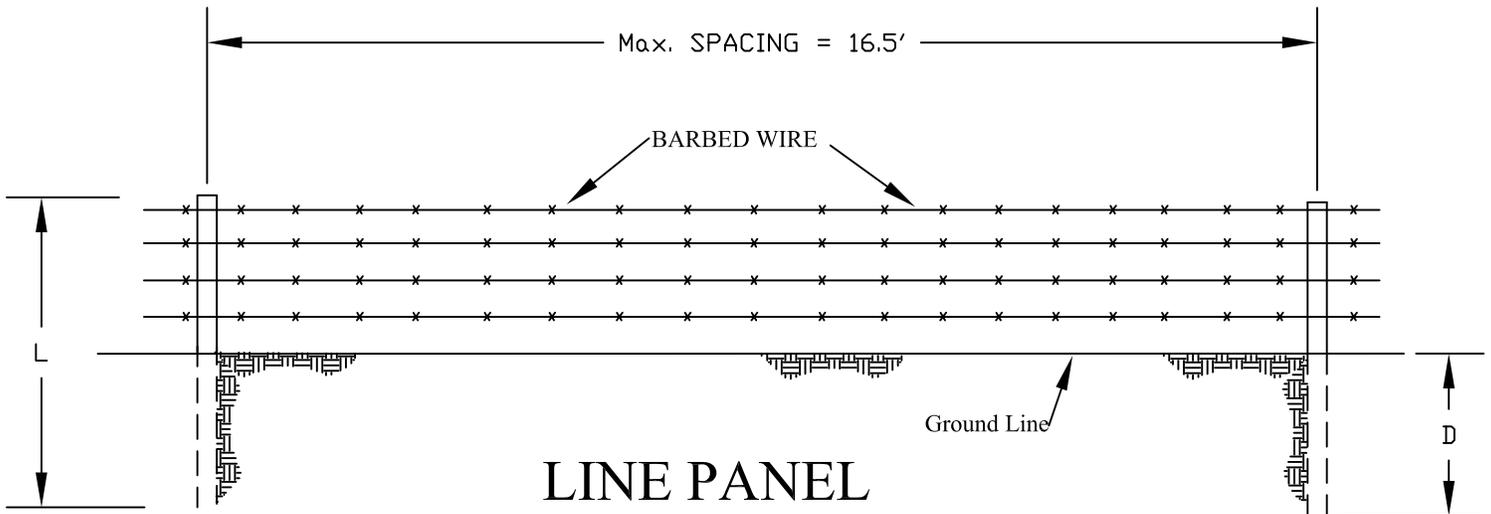

POSTS

Wood: L = 7 Ft. Min.
 D = 3 Ft. Min.
 Dia = 4 In. Min.

ALL WOOD POSTS EXCEPT RED CEDAR, BLACK LOCUST, TAMARAC, WHITE CEDAR, REDWOOD, WHITE OAK, AND BURR OAK SHALL BE TREATED BY A METHOD SUCH THAT COMPLETE SATURATION OF THE SAPWOOD IS OBTAINED.

STEEL: L = 5.5 Ft. Min
 D = 1.5 Ft. Min
 Standard "T" ≥ 1.25 lbs/ft.

ALL STEEL POSTS WILL HAVE AN ANCHOR PLATE ATTACHED AND WILL BE EITHER GALVANIZED OR PAINTED.

FASTENERS

STAPLES: L = 1.5" Min. FOR SOFTWOODS
 L = 1.0" Min. FOR HARDWOODS

SPACE SHALL BE LEFT BETWEEN POSTS AND STAPLES TO PERMIT FREE MOVEMENT OF THE WIRE

WIRE CLIPS WILL BE PROVIDED BY MANUFACTURER
 OR GALVANIZED WIRE 12 Ga. Min.

WIRE

BARBED: 12.5 Ga. Min. CONVENTIONAL
 15.5 Ga. HIGH TENSILE

14 Ga. OR HEAVIER TWO POINT BARBS ON APPROXIMATE 5 In. CENTERS

ALL WIRE SHALL HAVE SUFFICIENT COATING TO PROTECT THE WIRE FOR THE MINIMUM LIFE EXPECTANCY OF 20 YEARS.

PERIMETER _____ INTERIOR _____

	PLANNED	APPLIED
# WIRES	_____	_____
LINEAR FEET	_____	_____
FIELD #	_____	_____
CIN	_____	_____

PLANNING ASSISTANCE BY

 Name and Date

PRACTICE MEETS MN NRCS STANDARDS AND SPECIFICATIONS
 YES _____ NO _____

CERTIFIED BY:

 Name and Date