


WOVEN WIRE FENCE

_____ High Tensile Woven Max. Spacing 25'

_____ Standard Woven Max. Spacing 16.5'

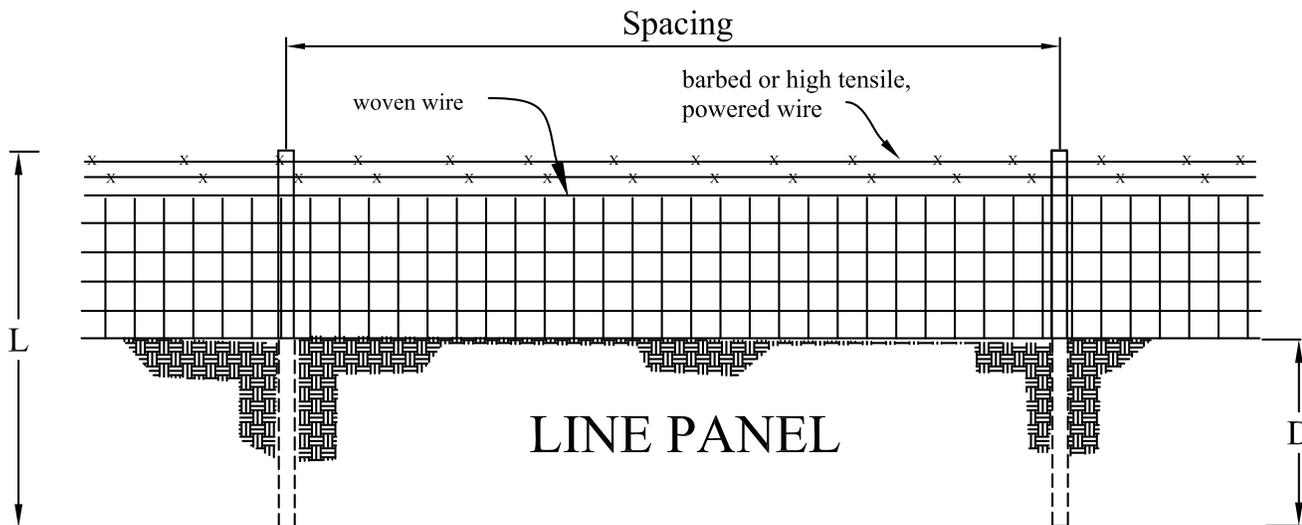

POSTS

WOOD: L= 7 Ft. Min.
 D= 3 Ft.Min.
 Dia= 4 In. Min.

ALL WOOD POSTS EXCEPT RED CEDAR, BLACK LOCUST, TAMARACK, WHITE CEDAR, REDWOOD, WHITE OAK, AND BURR OAK SHALL BE TREATED BY A METHOD SUCH THAT COMPLETE SATURATION OF THE SAPWOOD IS OBTAINED.

STEEL: L= 5.5 Ft. Min.
 D= 1.5 Ft. Min.
 Standard "T" ≥ 1.25 Lbs./ Ft.

ALL STEEL POSTS WILL HAVE AN ANCHOR PLATE ATTACHED AND WILL BE EITHER GALVANIZED OR PAINTED.

FASTENERS

STAPLES: L= 1.5 In. Min. FOR SOFTWOODS
 L= 1 In. Min. FOR HARDWOODS

SPACE SHALL BE LEFT BETWEEN POSTS AND STAPLES TO PERMIT FREE MOVEMENT OF THE WIRE.

WIRE CLIPS: WILL BE PROVIDED BY MANUFACTURERS OR GALVANIZED WIRE 12 Ga. Min.

WIRE

BARBED: 12.5 Ga. CONVENTIONAL
 15.5 Ga. HIGH TENSILE
 14 Ga. OR HEAVIER TWO POINT BARBS ON APPROX. 5 In. CENTERS.
 HIGH TENSILE: 12.5 Ga. Min.
 135,000 Psi Min. TENSILE STRENGTH

WOVEN: 11 Ga. Min. TOP & BOTTOM WIRES
 12.5 Ga. Min. LINE & STAY WIRES
 12.5 Ga. Min. HIGH TENSILE
 DO NOT MIX BARBED AND HIGH TENSILE WIRE.
 DO NOT ELECTRIFY BARBED WIRE.

ALL WIRE SHALL HAVE SUFFICIENT COATING TO PROTECT THE WIRE FOR THE MINIMUM LIFE EXPECTANCY OF 20 YEARS.

PERIMETER _____ INTERIOR _____

32" WOVEN W/ 2 BARB OR 2 HT POWERED _____
 36" WOVEN W/ 1 BARB OR 1 HT POWERED _____

	PLANNED	APPLIED
LINEAR FEET	_____	_____
FIELD #	_____	_____
CIN	_____	_____

PLANNING ASSISTANCE BY:

 Name and Date

PRACTICE MEETS MN NRCS STANDARDS AND SPECIFICATIONS

YES _____ NO _____

CERTIFIED BY:

 Name and Date