


# PULL BRACE ASSEMBLY

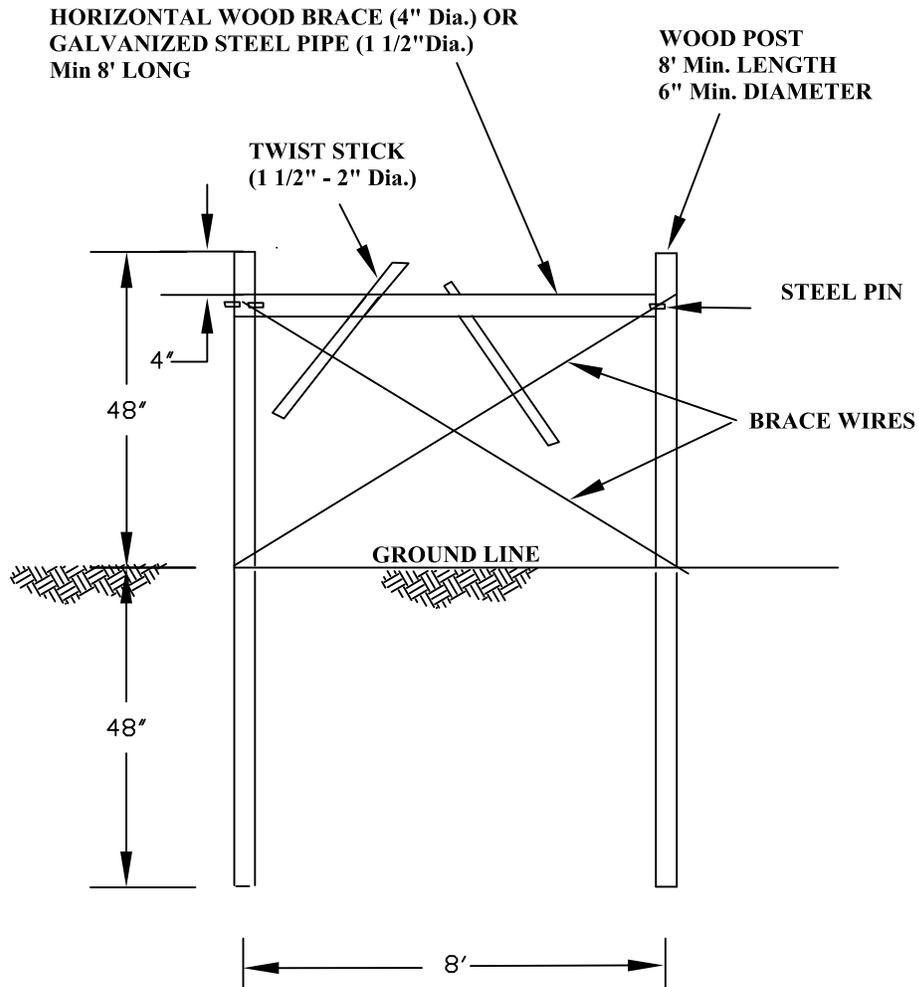

## POSTS

ALL WOOD POSTS EXCEPT RED CEDAR, BLACK LOCUST, TAMARACK, WHITE CEDAR, REDWOOD, WHITE OAK, AND BURR OAK SHALL BE TREATED BY A METHOD SUCH THAT COMPLETE SATURATION OF THE SAPWOOD IS OBTAINED.

USED RAILROAD TIES OR HIGHLINE POLES IN SOUND CONDITION MAY BE UTILIZED FOR POSTS IF FREE FROM CRACKING OR DECAY.

## BRACE WIRE

2 COMPLETE LOOPS OF 9 Ga. WIRE OR 1 COMPLETE LOOP OF 12.5 Ga. HIGH TENSILE WIRE.

ALL WIRE SHALL HAVE A SUFFICIENT COATING TO PROTECT THE WIRE FOR THE MINIMUM LIFE EXPECTANCY OF 20 YEARS.

**PULL ASSEMBLIES ARE REQUIRED IN STRAIGHT SECTIONS OF THE FENCE SO THAT THE MAXIMUM DISTANCE BETWEEN BRACES DOES NOT EXCEED:**

- 330 Ft. WOVEN WIRE FENCE
- 660 Ft. BARB WIRE FENCE
- 1320 Ft. HIGH TENSILE WOVEN WIRE
- 2640 Ft. POWER FENCE

PRACTICE MEETS MN NRCS STANDARDS AND SPECIFICATIONS

YES \_\_\_\_\_ NO \_\_\_\_\_

CERTIFIED BY:

\_\_\_\_\_  
Name and Date