


DOUBLE PULL BRACE ASSEMBLY

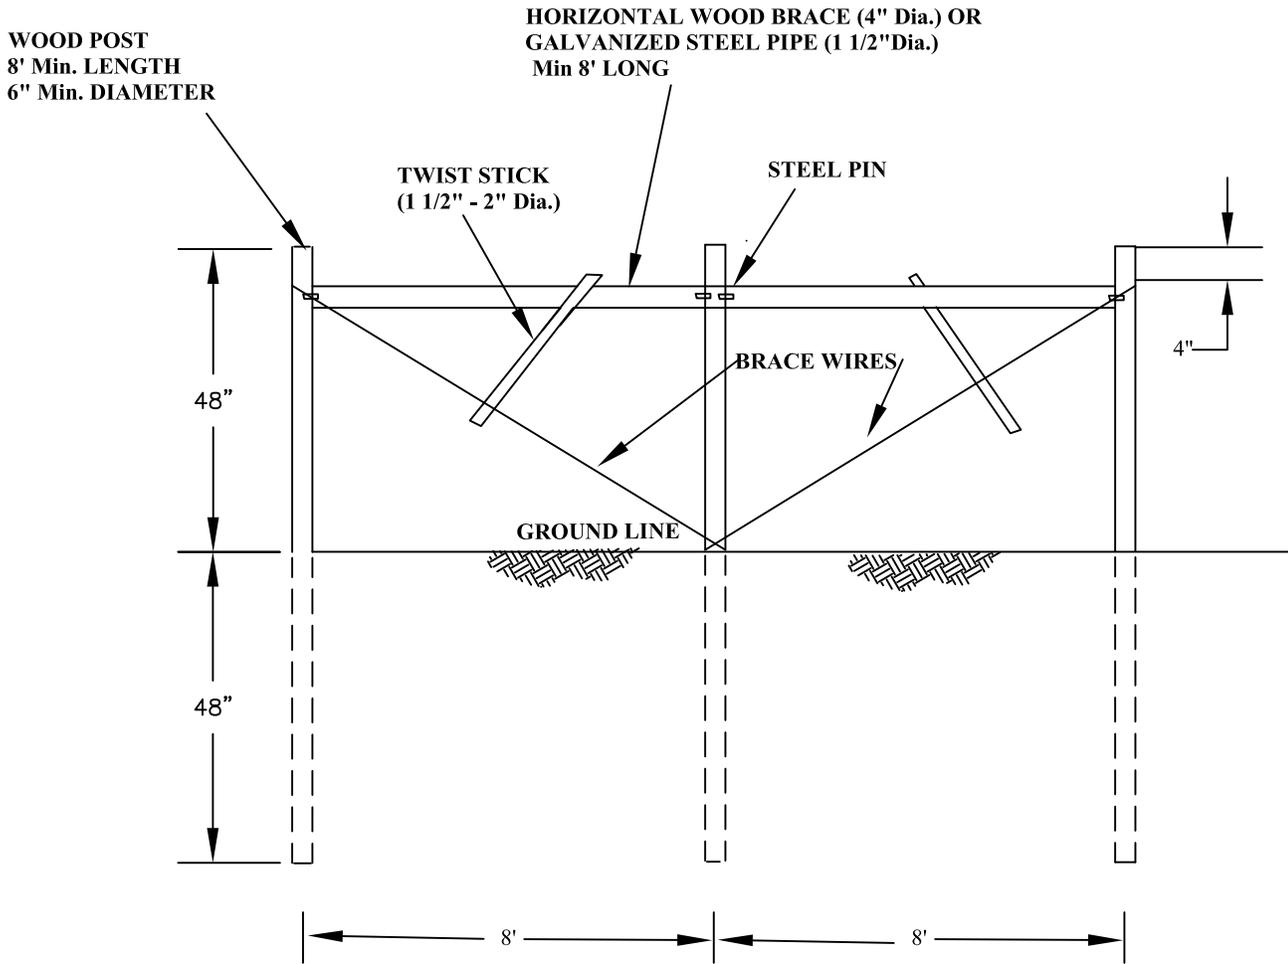

POSTS

ALL WOOD POSTS EXCEPT RED CEDAR, BLACK LOCUST, TAMARACK, WHITE CEDAR, REDWOOD, WHITE OAK, AND BURR OAK SHALL BE TREATED BY A METHOD SUCH THAT COMPLETE SATURATION OF THE SAPWOOD IS OBTAINED.

USED RAILROAD TIES OR HIGHLINE POLES IN SOUND CONDITION MAY BE UTILIZED FOR POSTS IF FREE FROM CRACKING OR DECAY.

BRACE WIRE

2 COMPLETE LOOPS OF 9 Ga. WIRE OR 1 COMPLETE LOOP OF 12.5 Ga. HIGH TENSILE WIRE.

ALL WIRE SHALL HAVE A SUFFICIENT COATING TO PROTECT THE WIRE FOR THE MINIMUM LIFE EXPECTANCY OF 20 YEARS.

PULL ASSEMBLIES ARE REQUIRED IN STRAIGHT SECTIONS OF THE FENCE SO THAT THE MAXIMUM DISTANCE BETWEEN BRACES DOES NOT EXCEED:

- 330 Ft. WOVEN WIRE FENCE
- 660 Ft. BARB WIRE FENCE
- 1320 Ft. HIGH TENSILE WOVEN WIRE
- 2640 Ft. POWER FENCE

PRACTICE MEETS MN NRCS STANDARDS AND SPECIFICATIONS:

YES _____ NO _____

CERTIFIED BY:

_____ Name and Date

MN-ECS-025
5-06

"State law and NRCS policy require that the excavator contact Gopher State One Call at (800) 252-1166 for utility locations 48 hours prior to the start of excavation work."