




TYPICAL SECTION K-K

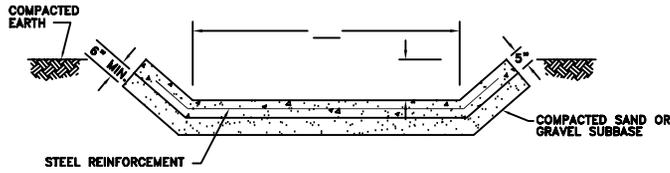


TYPICAL SECTION J-J

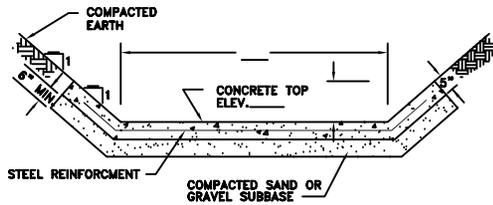


TYPICAL SECTION I-I

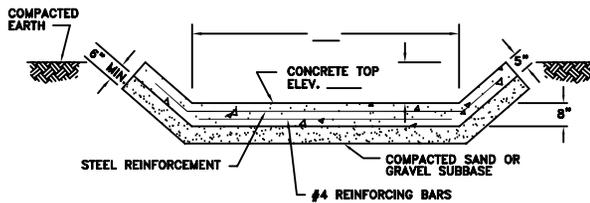

TYPICAL SECTION H-H

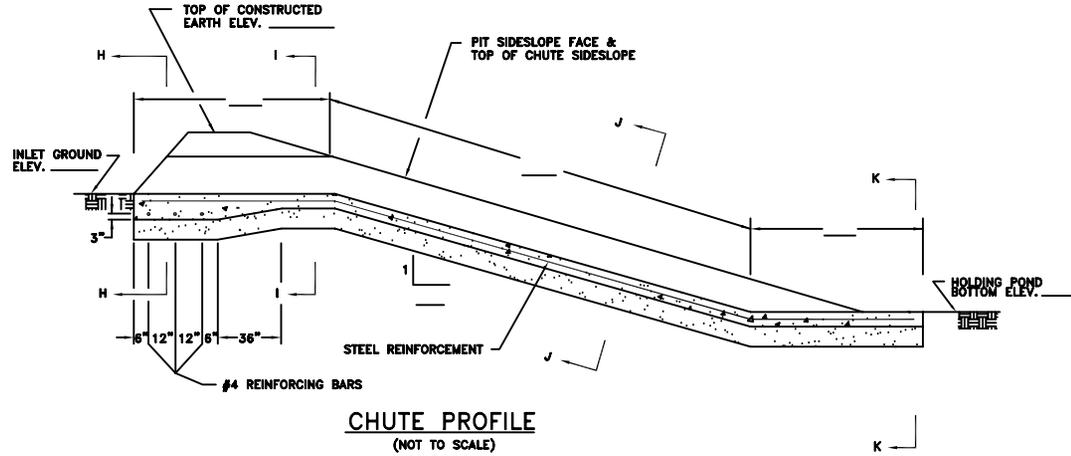

CHUTE PROFILE
(NOT TO SCALE)

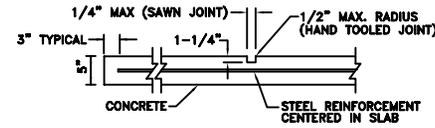

TYPICAL CONTROL JOINT DETAIL
AND STEEL REINFORCEMENT DETAILS

MATERIALS NOTES

1. CONCRETE SHALL BE AIR-ENTRAINED.
2. CONCRETE SHALL BE CLASS 4000 (NO LESS THAN 6 BAGS OF CEMENT /C.Y. AND NO MORE THAN 6 GAL OF WATER /BAG OF CEMENT).
3. THE SAND OR GRAVEL SUBBASE MATERIAL SHALL BE CLEAN PIT RUN SAND OR GRAVEL WITH LESS THAN 5% BY WEIGHT PASSING THE #200 SIEVE.

CONSTRUCTION NOTES

1. CONTROL JOINTS SHALL DIVIDE THE CHUTE INTO SQUARE OR RECTANGULAR SECTIONS (HORIZONTAL PROJECTION) WITH THE LONGER SIDE BEING NO MORE THAN ONE-AND-A-HALF TIMES THE LENGTH OF THE SHORTER SIDE. THE MAXIMUM SPACING SHALL BE 30 FEET.
2. WWF 6" X 6" W1.4 X W1.4 CAN BE USED ON THE SLOPE AND THE OUTLET LEVEL SECTION ONLY.
3. ANY FORMS USED IN CONSTRUCTION SHALL BE REMOVED.

CHUTE QUANTITIES

| QUANTITY | UNIT | ITEM |
|----------|----------|--------------------------|
| _____ | CU. YDS. | EXCAVATION |
| _____ | CU. YDS. | SAND OR GRAVEL SUBBASE |
| _____ | CU. YDS. | CONCRETE CLASS 4000 |
| _____ | SQ. FT. | WWF 6" X 6" W1.4 X W1.4 |
| _____ | SQ. FT. | WWF 6" X 6" W2.9 X W2.9 |
| _____ | LN. FT. | REINFORCING BARS |
| | | # _____ GRADE _____ |
| | | #3 @ 10" GRADE 40, |
| | | #3 @ 12" GRADE 60, |
| | | #4 @ 18" GRADE 40 OR 60, |

DATE

| | |
|----------|-------|
| Designed | _____ |
| Drawn | _____ |
| Checked | _____ |
| Approved | _____ |

WASTE MANAGEMENT SYSTEM
RUNOFF INLET CHUTE - PROFILE & DETAILS



File No.
MN606.dwg
Drawing No.
MN-563-606
5/02

| REVISIONS | |
|-----------|------|
| NO. | DATE |
| | |
| | |

Sheet of _____